

Smart Energy Controller



Active Safety

AI Powered
Active Arcing Protection



Higher Yields


Up to 30% More
Energy with Optimizer




2x POWER Battery Ready

5KW AC Output plus
5KW Battery Charge

Efficiency Curve

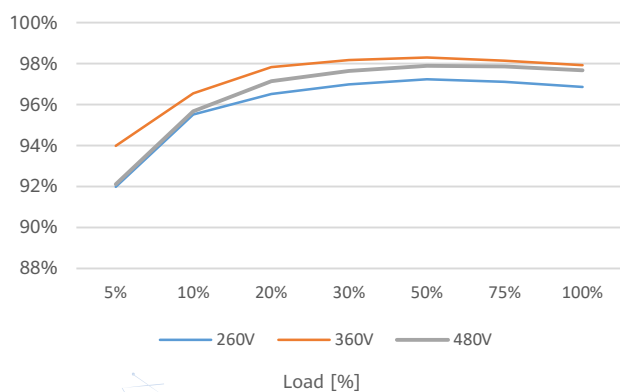

Circuit Diagram

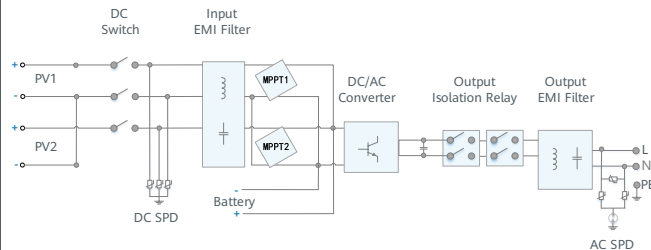

SUN2000-2/3/3.68/4/4.6/5/6KTL-L1

Technical Specification

Technical Specification	SUN2000 -2KTL-L1	SUN2000 -3KTL-L1	SUN2000 -3.68KTL-L1	SUN2000 -4KTL-L1	SUN2000 -4.6KTL-L1	SUN2000 -5KTL-L1	SUN2000 -6KTL-L1
-------------------------	---------------------	---------------------	------------------------	---------------------	-----------------------	---------------------	---------------------

Efficiency							
Max. efficiency	98.2 %	98.3 %	98.4 %	98.4 %	98.4 %	98.4 %	98.4 %
European weighted efficiency	96.7 %	97.3 %	97.3 %	97.5 %	97.7 %	97.8 %	97.8 %

Input (PV)							
Recommended max. PV power ¹	3,000 Wp	4,500 Wp	5,520 Wp	6,000 Wp	6,900 Wp	7,500 Wp	9,000 Wp
Max. input voltage	600 V ²						
Start-up voltage	100 V						
MPPT operating voltage range	90 V – 560 V ²						
Rated input voltage	360 V						
Max. input current per MPPT	12.5 A						
Max. short-circuit current	18 A						
Number of MPP trackers	2						
Max. input number per MPP tracker	1						

Input (DC Battery)							
Compatible Battery	LG Chem RESU 7H_R / 10H_R						
Operating voltage range	350 ~ 450 Vdc						
Max operating current	10 A @7H_R / 15 A @10H_R						
Max charge power	3,500 W @7H_R / 5,000 W @10H_R						
Max discharge Power @7H_R	2,200 W	3,300 W	3,500 W	3,500 W	3,500 W	3,500 W	3,500 W
Max discharge Power @10H_R	2,200 W	3,300 W	3,680 W	4,400 W	4,600 W	5,000 W	5,000 W

Compatible Battery	HUAWEI Smart LUNA2000 ESS Battery 5kWh – 30kWh						
Operating voltage range	350 ~ 560 Vdc						
Max operating current	15 A						
Max charge Power	5,000 W ³						
Max discharge Power	2,200 W	3,300 W	3,680 W	4,400 W	4,600 W	5,000 W	5,000 W

Output (On Grid)							
Grid connection	Single phase						
Rated output power	2,000 W	3,000 W	3,680 W	4,000 W	4,600 W	5,000 W ⁴	6,000 W
Max. apparent power	2,200 VA	3,300 VA	3,680 VA	4,400 VA	5,000 VA ⁵	5,500 VA ⁶	6,000 VA
Rated output voltage	220 Vac / 230 Vac / 240 Vac						
Rated AC grid frequency	50 Hz / 60 Hz						
Max. output current	10 A	15 A	16 A	20 A	23 A ⁷	25 A ⁷	27.3 A
Adjustable power factor	0.8 leading ... 0.8 lagging						
Max. total harmonic distortion	≤ 3 %						

Output (Off Grid)							
Backup Box (Optional)	Backup Box – B0						
Maximum apparent power	2,000 VA	3,000 VA	3,680 VA	4,000 VA	4,600 VA	5,000 VA	5,000 VA
Rated output voltage	220 V / 230 V						
Maximum output current	9.1 A	13.6 A	16.7 A	18.2 A	20.9 A	22.7 A	22.7 A
Power factor range	0.8 leading ... 0.8 lagging						

^{*1} Inverter max input PV power is 10,000 Wp when long strings are designed and fully connected with SUN2000-450W-P power optimizers.

^{*2} The maximum input voltage and operating voltage upper limit will be reduced to 495 V when inverter connects and works with LG battery.

^{*3} 2,500 W @ 5kWh HUAWEI ESS battery

^{*4} AS4777.2: 4,991W. ^{*5} VDE-AR-N 4105: 4,600VA / AS4777.2: 4,999VA. ^{*6} AS4777.2: 4,999VA / C10/11: 5,000VA ^{*7} AS4777.2: 21.7A.

SUN2000-2/3/3.68/4/4.6/5/6KTL-L1

Technical Specification

Technical Specification	SUN2000 -2KTL-L1	SUN2000 -3KTL-L1	SUN2000 -3.68KTL-L1	SUN2000 -4KTL-L1	SUN2000 -4.6KTL-L1	SUN2000 -5KTL-L1	SUN2000 -6KTL-L1 ¹
-------------------------	---------------------	---------------------	------------------------	---------------------	-----------------------	---------------------	----------------------------------

Protection & Feature	
Anti-Islanding protection	Yes
DC reverse polarity protection	Yes
Insulation monitoring	Yes
DC surge protection	Yes, compatible with TYPE II protection class according to EN/IEC 61643-11
AC surge protection	Yes, compatible with TYPE II protection class according to EN/IEC 61643-11
Residual current monitoring	Yes
AC overcurrent protection	Yes
AC short-circuit protection	Yes
AC overvoltage protection	Yes
Over-heat protection	Yes
Arc fault protection	Yes
Battery reverse charging from grid	Yes

General Data	
Operating temperature range	-25 ~ +60 °C
Relative operating humidity	0 %RH ~ 100 %RH
Max. operating altitude	4,000 m (13,123 ft.) (Derating above 2000 m)
Cooling	Natural convection
Display	LED indicators; integrated WLAN + FusionSolar APP
Communication	RS485, WLAN via inverter built-in WLAN module Ethernet via Smart Dongle-WLAN-FE (Optional); 4G / 3G / 2G via Smart Dongle-4G (Optional)
Weight (incl. mounting bracket)	12.0 kg (26.5 lb)
Dimension (incl. mounting bracket)	365mm * 365mm * 156 mm (14.4 x 14.4 x 6.1 inch)
Degree of protection	IP65
Nighttime power consumption	< 2.5 W

Optimizer Compatibility	
DC MBUS compatible optimizer	SUN2000-450W-P

Standard Compliance (more available upon request)	
Safety	EN/IEC 62109-1, EN/IEC 62109-2
Grid connection standards	G98, G99, EN 50549-1, CEI 0-21, VDE-AR-N-4105, AS 4777.2, C10/11, ABNT, UTE C15-712, RD 1699, TOR D4, IEC61727, IEC62116

SMART STRING ENERGY STORAGE SYSTEM

Model: LUNA2000-5/10/15-S0



More Usable Energy
100% Depth of Discharge and
Pack-Level Energy Optimization



Flexible Investment
5 kWh Modular Design,
Scalable from 5 to 30 kWh



Safe & Reliable
5-layer Safety Protection
IP66



Easy Installation
12 kg Power Module
50 kg Battery Module




Quick Commissioning
Automatic Device
Discovery by the App



Perfect Compatibility
Compatible to Single & Three
Phase Inverters

● LUNA2000-5/10/15-S0 Technical Specification

	LUNA2000-5-S0	LUNA2000-10-S0	LUNA2000-15-S0
Technical Specification			

Performance			
Power module	LUNA2000-5KW-C0		
Number of power modules	1		
Battery module	LUNA2000-5-E0		
Battery module capacity	5 kWh		
Number of battery modules	1	2	3
Battery usable capacity ¹	5 kWh	10 kWh	15 kWh
Max. output power	2.5 kW	5 kW	5 kW
Peak output power	3.5 kW, 10s	7 kW, 10s	7 kW, 10s
Nominal voltage (single-phase system)	450 V		
Operating voltage range (single-phase system)	350–560 V		
Nominal voltage (three-phase system)	600 V		
Operating voltage range (three phase system)	600–980 V		
Communication			
Display	SOC status indicator, LED indicator		
Communication	RS485/CAN (only for parallel operation)		
General Specification			
Dimensions (W x D x H)	670 mm x 150 mm x 600 mm (26.4 in. x 5.9 in. x 23.6 in.)	670 mm x 150 mm x 960 mm (26.4 in. x 5.9 in. x 37.8 in.)	670 mm x 150 mm x 1320 mm (26.4 in. x 5.9 in. x 60.0 in.)
Weight (Floor stand toolkit included)	63.8 kg (140.7 lb)	113.8 kg (250.9 lb)	163.8 kg (361.1 lb)
Power module dimension (W x D x H)	670 mm x 150 mm x 240 mm (26.4 in. x 5.9 in. x 9.4 in.)		
Power module weight	12 kg (26.5 lb)		
Battery module dimensions (W x D x H)	670 mm x 150 mm x 360 mm (26.4 in. x 5.9 in. x 14.0 in.)		
Battery module weight	50 kg (110.2 lb) ²		
Installation	Floor stand (standard), Wall mount (optional)		
Operating temperature	–20°C to +55°C (–4°F to +131°F) ³		
Max. operating altitude	4,000 m (13,123 ft.) (Derated above 2,000 m)		
Environment	Outdoor/Indoor ⁴		
Relative humidity	5%–95% RH		
Cooling	Natural convection		
IP rating	IP 66		
Noise emission ⁵	< 29 dB		
Cell technology	Lithium-iron phosphate (LiFePO4)		
Compatible inverters ⁶	SUN2000-2/3/3.68/4/4.6/5/6KTL-L1, SUN2000-8/10K-LC0 SUN2000-3/4/5/6/8/10KTL-M1, SUN2000-12/15/17/20/25K-MB0 SUN2000-5/6/8/10/12K-MAP0, SUN5000-8/12K-MAP0, SUN5000-17/25K-MB0		
Standards Compliance (More Available Upon Request)			
Certificates	CE, RCM, CEC, VDE2510-50, IEC62619, IEC 60730, UN38.3		
Ordering and Deliverable Part			
Available for ordering ⁷	LUNA2000-5KW-C0, LUNA2000-5-E0, LUNA2000 Wall Mounting Bracket		

^{*1} Test conditions: 100% depth of discharge (DoD), 0.2C rate charge & discharge at 25°C, at the beginning of life. If no PV modules are installed or the system has not detected sunlight for at least 24 hours, the minimum end-of-discharge SOC is 15%.

^{*2} The weight of the battery modules varies with products, with a tolerance of ±3%.

^{*3} Refer to battery warranty letter for conditional application.

^{*4} Outdoor installation is recommended. For indoor installation, refer to the user manual for instruction.

^{*5} Noise level (typical): < 29 dB(A) @1 m, 30°C, power on and run stably for 2 hours

^{*6} Please contact a local engineer for compatibility information.

^{*7} The power module and battery modules of the storage system are separately ordered in the required quantity.

Disclaimer: The preceding values are measured by an internal laboratory of Huawei in a specific environment. The actual values may vary with products, software versions, usage conditions, and environmental factors.